ADDO L96V

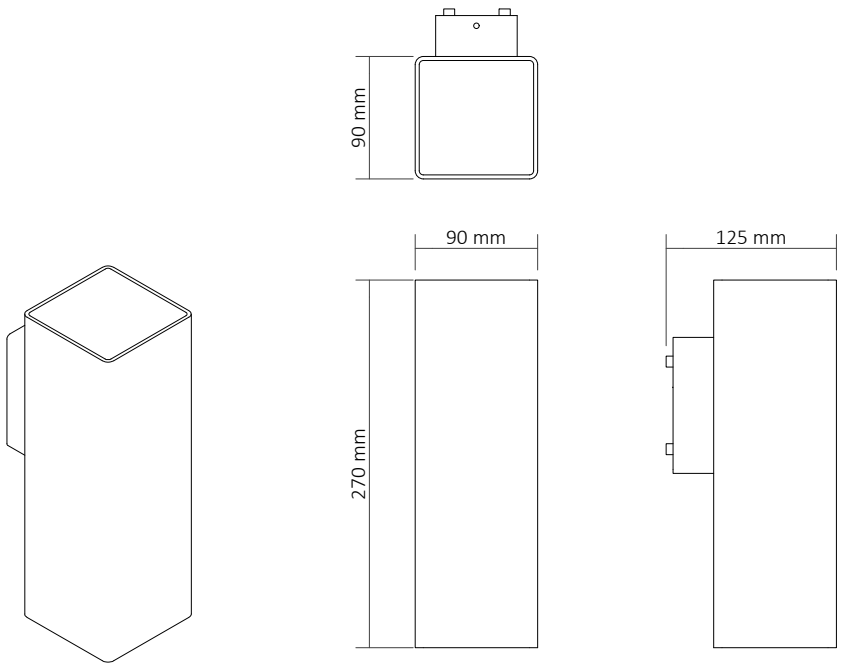

ADDO L96V - WALL LIGHT

Design: Friis & Moltke design A/S

Light distribution	Symmetrical distribution of light. Downlight
Materials	Hot galvanized steel or powder coated hot galvanized steel
Optics/Reflector	Prismatic shockproof acrylic lamp cover, UV-resistant
Light source	LED 8W/830/750Lm. 50Khrs LED 4W/830/500Lm. 50Khrs
Installation	Wall mounted. 2 cable inlets backwards
Connection	2 cables max. 3×1,5 mm² 2 cable inlets backwards

CE

Classification: IP56. IK10. Insulation safety class I

Weight 3 kg.

Lampas