NYE L1001

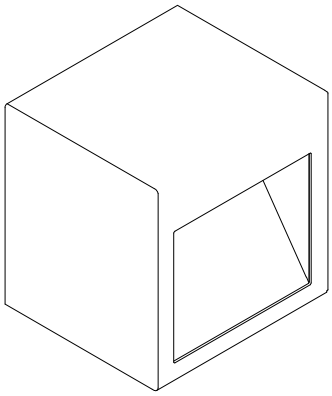

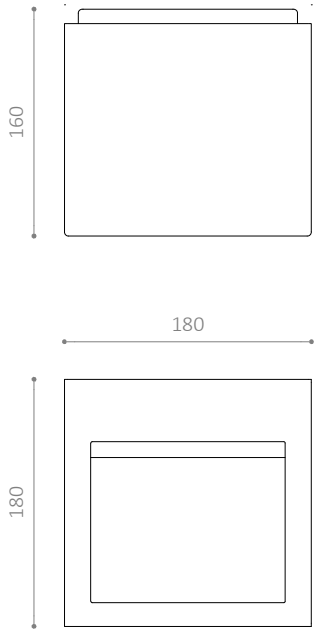

NYE L1001 - WALL LIGHT

DESIGN: VE2

LIGHT DISTRIBUTION
Direct symmetrical forward light with a downlight light effect

MATERIALS
Lamp housing: Untreated corten steel, hot-dip galvanised steel or powder coated steel
Shade: Opal white, impact resistant polycarbonate

DIMENSIONS

Lamp housing:	H:180 x W:180 x D:160 mm
Weight:	4,6 kg

LUMINOUS FLUX

Luminous efficacy:	9,5 Lm/W @3000K, 70Ra
Lumen:	>143Lm @3000K, 70Ra

LIGHT SOURCE

LED type:	Philips Fortimo FastFlex
Operational life:	>120.000 hours at Ta 25° C. L80B10
Total consumption:	Standard 11W (max 15W)
Colour temperature:	2200K, 2700K, 3000K, 4000K
Colour rendering:	CRI>70
Colour accuracy:	5 steps SDCM

DRIVER

Driver type:	Philips Xitanium
Operational life:	>50.000 hours
Surge protection:	>2 kV
Control:	No. Compatible with DALI as optional extra.

INSTALLATION
Wall mounted

CONNECTION
Access backwards. 2 cables max 5 x 2,5 mm². 5-pole push-in terminal

CLASSIFICATION
IP43, IK10, Insulation safety class I

Available as 3D in Archicad BIM library

Lampas

reddot winner 2020
best of the best

CE