OUTFIT L900

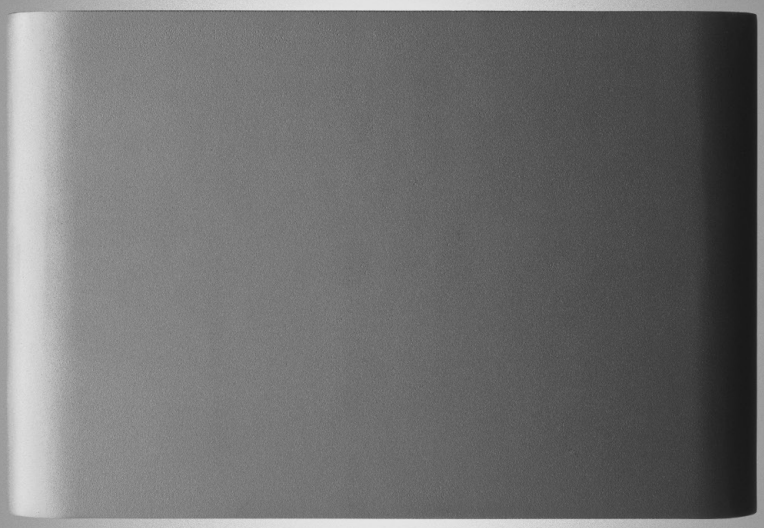

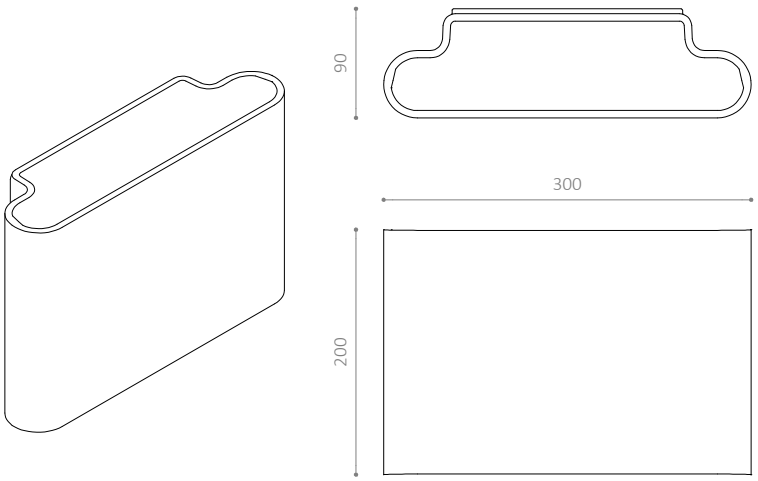

OUTFIT L900 - WALL LIGHT

DESIGN: ANNE QVIST DESIGN OFFICE

LIGHT DISTRIBUTION
Direct, symmetrical and diffused light distribution.
Up- & downlight

MATERIALS
Lamp housing: Mold cast aluminum, powder coated
Shade: Polycarbonate Satiné-Blend. LED optimized

DIMENSIONS

Lamp housing:	H:200 x W:300 x D:90 mm
Weight:	2,2 kg

LUMINOUS FLUX

Luminous efficacy:	35 Lm/W
Lumen, 80 Ra:	3000K: >595Lm, 4000K: >655Lm

LIGHT SOURCE

LED type:	Philips Fortimo LEDstrip
Operational life:	>70.000 hours at Ta 25° C. L80B10
Total consumption:	Default 10W (max 17W)
Colour temperature:	3000K, 4000K
Colour rendering:	CRI >80 (Std.), CRI>90 (Opt.)
Colour accuracy:	3 steps SDCM

DRIVER

Driver type:	Philips Xitanium
Operational life:	>50.000 hours
Surge protection:	>2 kV
Control:	No. Compatible with DALI og Casambi as optional extra

INSTALLATION
Wall mounted

CONNECTION
Access backwards. 2 cables max 5 x 2,5 mm². 5-pole push-in terminal

CLASSIFICATION
IP56, IK10, Insulation safety class I

Lampas

CE