


LIGHTHOUSE L209



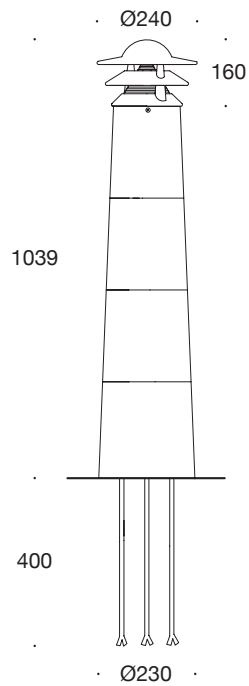

LIGHTHOUSE L209 - BOLLARD LIGHT

Design: Peter Bysted

Light distribution

Diffuse and rotationally symmetrical distribution of light

Materials

Cast iron or powder coated cast iron

Optics

Lamp cover in shockproof frosted polycarbonate

Height

1039 mm

Light source

E27 Retrofit LED

Light source is not included and must be ordered separately

Installation

Internal flange with 3 embedding anchors. Casting anchors included

Connection

3 cables max. 5 x 10 mm² / 2 cables max. 5 x 16 mm².

Connection box and fuse are included

CE

Classification: IP44. IK10. Insulation safety class II

Weight 55 kg.

Lampas