



OWEN L800

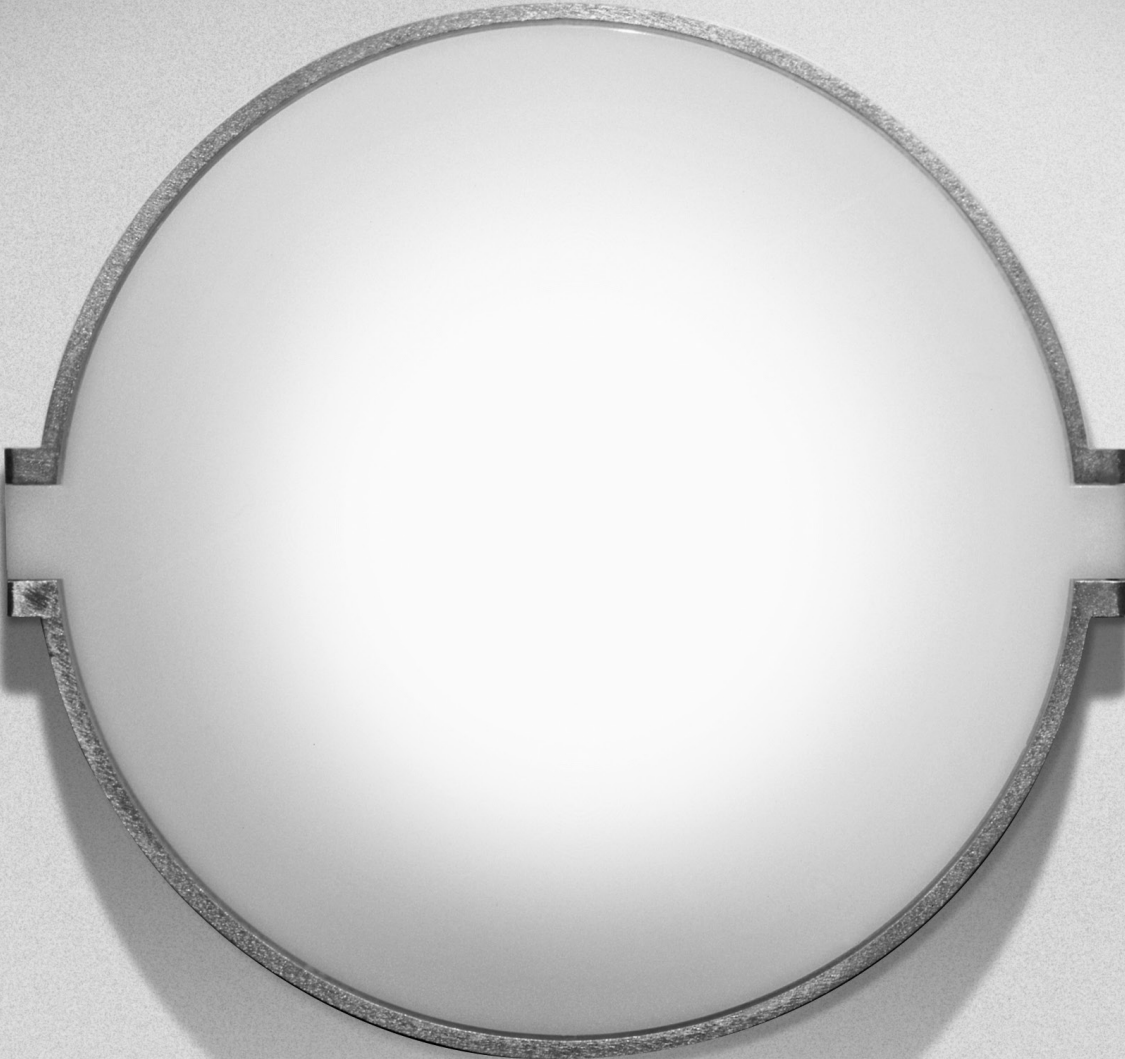

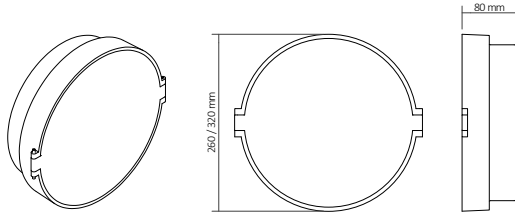

OWEN L800-260 - WALL/CEILING

Design: Cubo Arkitekter

Light distribution

Directly and symmetrically diffused

Materials

Housing in aluminium, powder coated
Ring in cast silumin, powder coated

Optics

Polycarbonate satiné blend lamp cover, LED optimized

Light source data

LED type: Optoga Edith230ED
Operational life: Min. 50.000 hours at ta max 25° C.
L80B10
Total consumption: 10W v/300mA
Colour temperature: 3000 or 4000 Kelvin
Colour rendering: CRI >80 (possibility for >90)
Colour accuracy: 3 steps SDCM
Luminous efficacy: N/A

Driver data

Driver type: Philips Xitanium
Operational life: Min. 50.000 hours
Ingress protection: 2 kV
Dimming: No. Can be delivered with DALI-driver against surcharge

Installation

Semi-recessed or surface mounted


Connection

Access backwards. 2 cables max 5 x 2,5 mm²
5-pole push-in terminal

CE

Classification: IP21. IK06. Insulation safety class I
Weight 1,5 kg.

Lampas

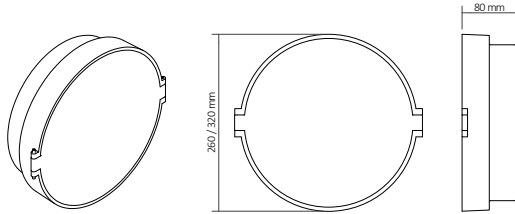

OWEN L800-320 - WALL/CEILING

Design: Cubo Arkitekter

Light distribution

Directly and symmetrically diffused

Materials

Housing in aluminium, powder coated
Ring in cast silumin, powder coated

Optics

Polycarbonate satiné blend lamp cover, LED optimized

Light source data

LED type: Optoga Edith290ED
Operational life: Min. 50.000 hours at ta max 25° C.
L80B10
Total consumption: 15W v/300mA
Colour temperature: 3000 or 4000 Kelvin
Colour rendering: CRI >80 (possibility for >90)
Colour accuracy: 3 steps SDCM
Luminous efficacy: N/A

Driver data

Driver type: Philips Xitanium
Operational life: Min. 50.000 hours
Ingress protection: 2 kV
Dimming: No. Can be delivered with DALI-driver against surcharge

Installation

Semi-recessed or surface mounted


Connection

Access backwards. 2 cables max 5 x 2,5 mm²
5-pole push-in terminal

CE

Classification: IP21. IK06. Insulation safety class I
Weight 2 kg.

Lampas

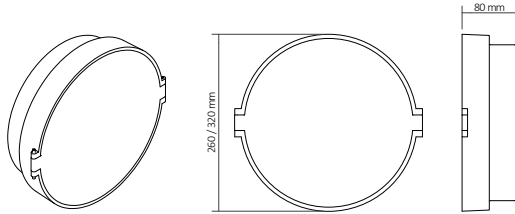

OWEN L800-130 - WALL/CEILING

Design: Cubo Arkitekter

Light distribution

Directly and symmetrically diffused

Materials

Housing in aluminium, powder coated
Ring in cast silumin, powder coated

Optics

Polycarbonate satiné blend lamp cover, LED optimized

Light source data

LED type: Optoga Lilly80AC 230V
Operational life: Min. 50.000 hours at ta max 25° C.
L80B10
Total consumption: 9W
Colour temperature: 3000 or 4000 Kelvin
Colour rendering: CRI >80 (possibility for >90)
Colour accuracy: 3 steps SDCM
Luminous efficacy: N/A
Surge protection: 1 kV
Dimming: DALI

Installation

Semi-recessed or surface mounted

Connection

Access backwards. 1 cable max 3 x 2,5 mm²
3-pole push-in terminal

CE

Classification: IP21. IK06. Insulation safety class I
Weight 1 kg.

Lampas