ANTO L1022

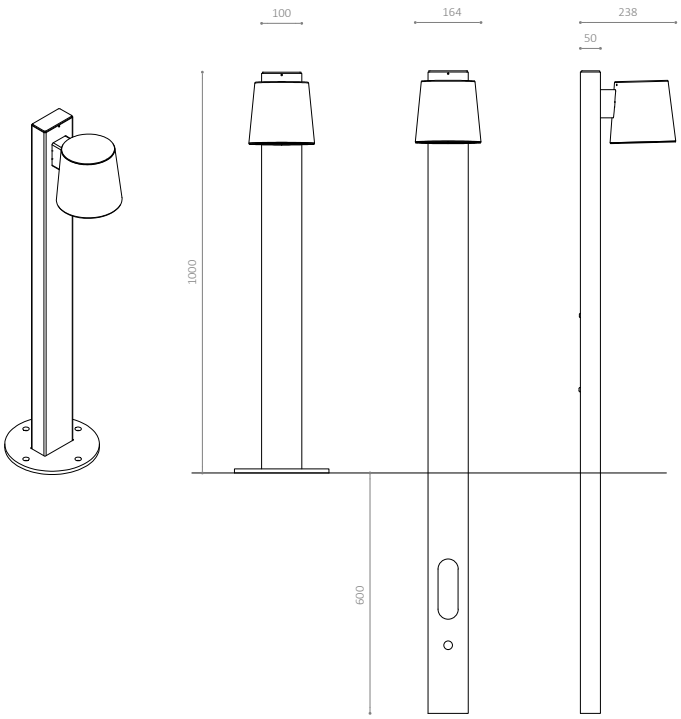

ANTO L1022 - BOLLARD LIGHT

DESIGN: VE2

DARK SKY CERTIFICATION
ANTO L1022 is Dark Sky Approved by DarkSky International. 3000k or lower must be selected to meet the DarkSky International certification criteria.

LIGHT DISTRIBUTION
Direct asymmetrical in forward directed or wide beam light distribution

MATERIALS
Hot-dip galvanised steel or powder coated, hot-dip galvanised steel
Shade: Polycarbonate satiné. UV resistant

DIMENSIONS

Height:	1000 mm
Post:	100 x 50 mm
Lamp housing:	Ø164 mm. Depth: 233 mm
Weight:	13,8 kg

LUMINOUS FLUX

Luminous efficacy:	1xLED: 80,2 Lm/W. 2xLED: 90,7Lm/W @3000K, 80Ra
Lumen:	1xLED: >1284Lm. 2xLED: >1452Lm @3000K, 80Ra

LIGHT SOURCE

LED type:	Bridgelux VERO 10 SE series
Operational life:	>100.000 hours at Ta 25° C. L80B10
Total consumption:	Forward directed light: Standard 7W (max 13W). Wide beam light: Standard 10W (max 16W)
Colour temperature:	2700K, 3000K, 4000K
Colour rendering:	CRI >80
Colour accuracy:	3 steps SDCM

DRIVER

Driver type:	Philips Xitanium
Operational life:	>100.000 hours
Surge protection:	>10 kV
Control:	Compatible with Dynadimmer, 1-10V by default. Compatible with DALI as optional extra.

INSTALLATION
Embedding or flange mounting

CONNECTION
2 cables max 3 x 2,5 mm2.
Connection box and fuse are included

CLASSIFICATION
CE, IP56, IK10, Insulation safety class II

Available as 3D in Archicad BIM library

Lampas

CE