NYE L1004

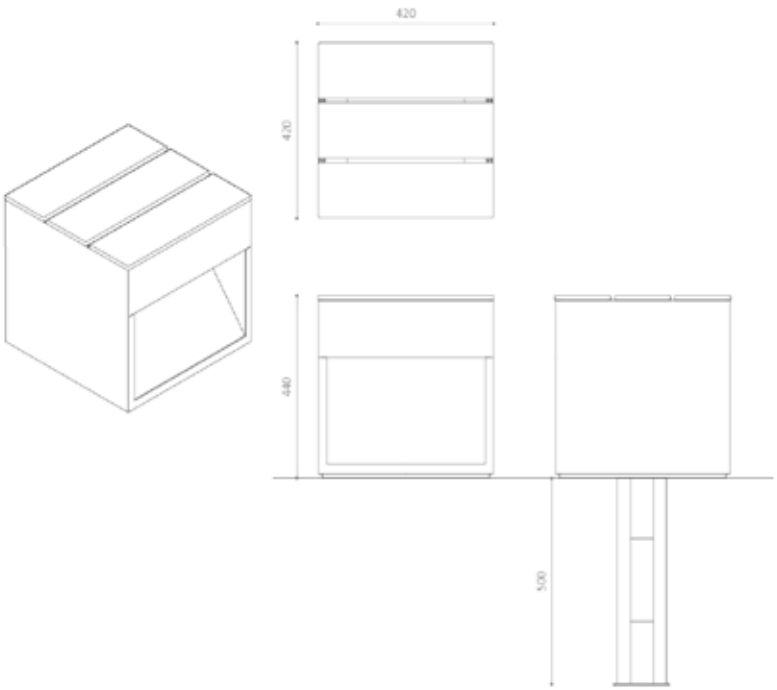

NYE L1004 – BOLLARD LIGHT WITH SEAT

DESIGN: VE2

LIGHT DISTRIBUTION
Direkt symmetrical forward and backward light

MATERIALS
Lamp housing: Untreated corten steel, hot-dip galvanised steel or powder coated, hot-dip galvanised steel. Wooden seat untreated FSC®-certified mahogany
Shade: Clear acrylic. UV resistant.

DIMENSIONS

Height:	440 mm
Width:	420 x 420 mm
Weight:	41,2 kg

LUMINOUS FLUX

Luminous efficacy:	>48 Lm/W
Lumen, 80 Ra:	>1839Lm @3000K, 80Ra

LIGHT SOURCE

LED type:	Philips Fortimo FastFlex
Operational life:	>120.000 timer at Ta 25° C. L80B10
Total consumption:	Standard 16W (max 38W)
Colour temperature:	2200K, 2700K, 3000K, 4000K
Colour rendering:	CRI >80 (Std.), CRI>70 (Opt.)
Colour accuracy:	5 steps SDCM

DRIVER

Driver type:	Philips Xitanium
Operational life:	>100.000 hours
Surge protection:	>10 kV
Control:	Compatible with Dynadimmer, 1-10V by default. Compatible with DALI as optional extra.

INSTALLATION
Supplied for bolting to the ground. For embedding, a foundation must be purchased separately

CONNECTION
2 cables max 5 x 6 mm². Connection box and fuse are included

CLASSIFICATION
IP56, IK10, Insulation safety class II

Available as 3D in Archicad BIM library

FSC
www.fsc.org
FSC® C016789
The mark of responsible forestry

Lampas

CE